Series Chart

SURFACE MOUNT TYPE (LOW VOLTAGE)

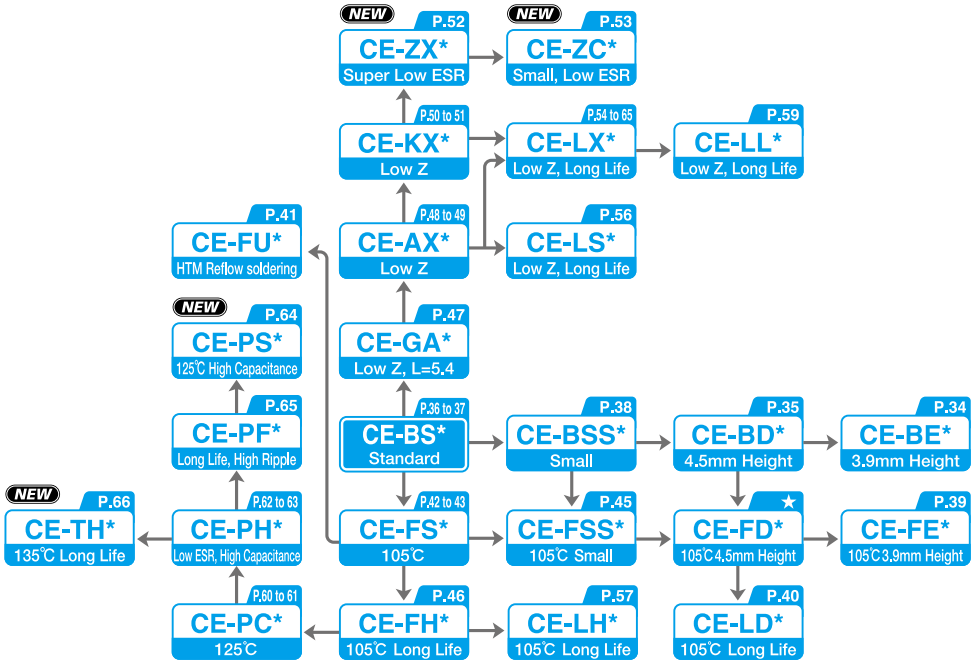

BI-POLAR

P.68 CE-FN* 105℃
P.67 CE-NP* Standard

MID.&HIGH VOLTAGE

P.58 CE-LH 105℃ 5000h
P.44 CE-FS 105℃ 2000h

RADIAL LEAD TYPE (LOW VOLTAGE)

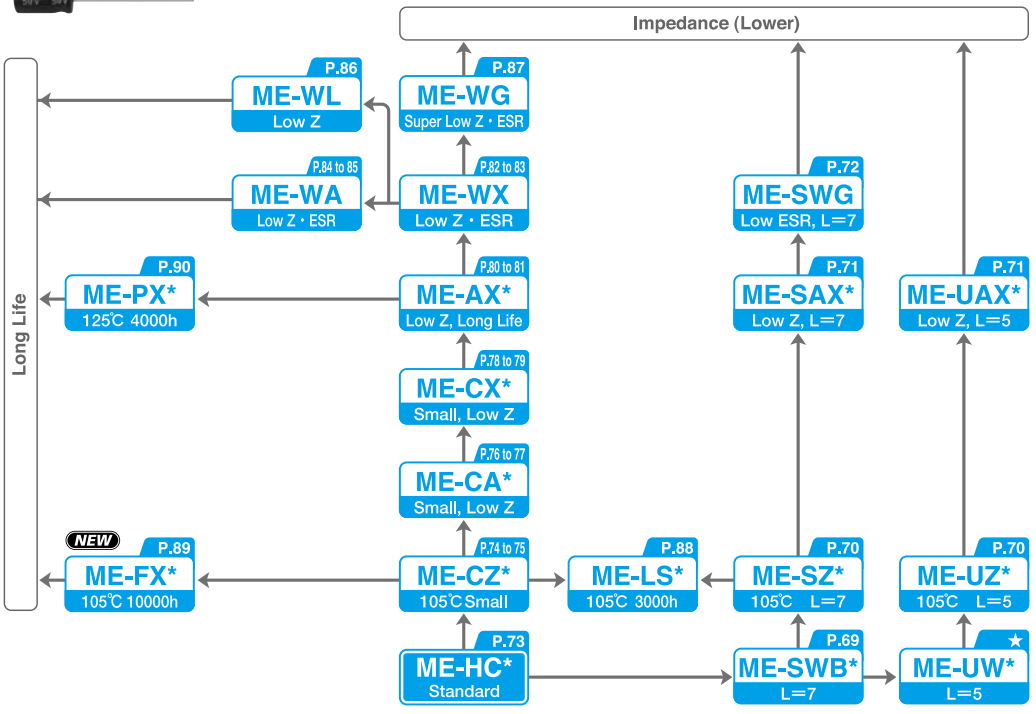

BI-POLAR

P.94 ME-SWN* L=7
P.95 ME-HWN* Standard

MID.&HIGH VOLTAGE

P.93 ME-FH 105℃ 12000h
P.92 ME-FC・FD 105℃ 2000h
P.91 ME-HPC・HPD 85℃ 2000h

★solvent proof

Please refer to http://www.sunelec.co.jp for the information where ★ marking is indicated.